

**SPECIFICATION SHEET**

**ELECTRONIC SPECIFICATION:**




***HCM0603A SERIES :***

Type	HCM0603A
Rated Voltage(V)	3.6
Operating Voltage(V)	2~5
Rated Current(mA)	≤80
Coil Resistance(Ω)	18±2
Output S.P.L(dB)	≥75
Rated Frequency(Hz)	3200
Operating Temp.(°C)	-20~+60
Storage Temp.(°C)	-30~+70
Housing Material	PPO
Weight (g)	0.3

**◆Dimension**

Unit:mm

Tolerance:±0.3mm

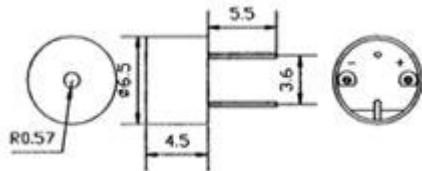

**◆Frequency Response**

Applied Voltage :3.6 V, 50% Duty Square Wave

Measuring Distance : 10cm

