

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM12A SERIES :

Type	HCM1201A	HCM1206A	HCM1212A
Rated Voltage(V)	1.5	6	12
Operating Voltage(V)	1~2	4~8	7~16
Rated Current(mA)	≤70	≤60	
Coil Resistance(Ω)	6.5±1	45±5	140±14
◎Coil Impedance(Ω)	16	80	240
★Sound Output at 10cm(dB)	≥75	≥85	
Rated Frequency(Hz)	2400		
Operating Temp.(°C)	-40~+85		
Storage Temp.(°C)	-40~+85		
Housing Material	Noryl SE1		
Weight (g)	2		

◆ Dimension

Unit:mm

Tolerance:±0.3mm

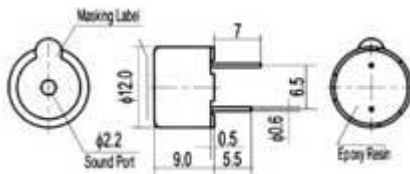

◆ Frequency Response

Applied Voltage: 6V,50%Duty Square Wave

Measuring Distance:10cm

