

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM12D SERIES :

Type	HCM1201D-1	HCM1201D-4	HCM1203D
Rated Voltage(V)	1.5		3.6
Operating Voltage(V)	1~5		
Rated Current(mA)	≤30	≤15	≤100
Coil Resistance(Ω)	16±5	42±6	16±5
◎Coil Impedance(Ω)	16	120	40
Output S.P.L(dB)	≥85	≥80	≥92
Rated Frequency(Hz)	2048		2080
Operating Temp.(°C)	-25~+70		
Storage Temp.(°C)	-30~+85		
Housing Material	Noryl-GFN2		
Weight (g)	2		

◆ Dimension

Unit:mm

Tolerance:±0.3mm

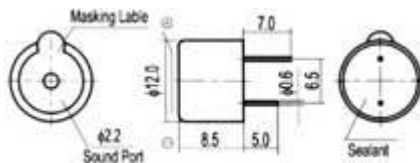

◆ Frequency Response

Applied Voltage : 1.5V, 50% Duty Square Wave

Measuring Distance : 10cm

