

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM12F SERIES :

Type	HCM1203F	HCM1205F	HCM1212F
Rated Voltage(V)	3	5	12
Operating Voltage(V)	2~5	4~8	7~16
Rated Current(mA)	≤60		
Coil Resistance(Ω)	25±4	45±4	140±4
◎Coil Impedance(Ω)	40	80	240
Output S.P.L(dB)	≥85		
Rated Frequency(Hz)	2400		
Operating Temp.(°C)	-40~+85		
Storage Temp.(°C)	-40~+85		
Housing Material	Noryl-GFN2		
Weight (g)	2		

◆ Dimension

Unit:mm

Tolerance:±0.3mm

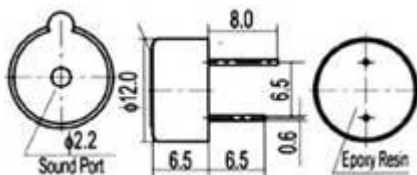

◆ Frequency Response

Applied Voltage : 5V, 50% Duty Square Wave

Measuring Distance : 10cm

