

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM16A SERIES :

Type	HCM1601A	HCM1606A	HCM1612A
Rated Voltage(V)	1.5	6	12
Operating Voltage(V)	1~2	4~8	9~15
Rated Current(mA)	≤12	≤50	
Coil Resistance(Ω)	27±3	50±5	115±12
◎Coil Impedance(Ω)	80	110	220
Output S.P.L(dB)	≥80	≥85	
Rated Frequency(Hz)	2048		
Operating Temp.(°C)	-30~+85		
Storage Temp.(°C)	-40~+85		
Housing Material	Noryl - SE1- GFN2		
Weight (g)	7		

◆ Dimension

Unit:mm

Tolerance:±0.3mm

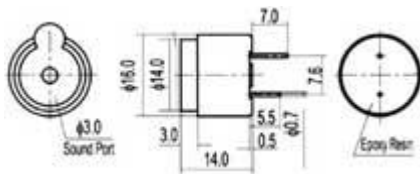

◆ Frequency Response

Applied Voltage : 5V, 50% Duty Square Wave

Measuring Distance : 10cm

