

**SPECIFICATION SHEET**

**ELECTRONIC SPECIFICATION:**




***HCM16D SERIES :***

| Type                 | HCM1606D          | HCM1612D |
|----------------------|-------------------|----------|
| Rated Voltage(V)     | 6                 | 12       |
| Operating Voltage(V) | 3~12              | 6~18     |
| Rated Current(mA)    | ≤40               |          |
| Coil Resistance(Ω)   | 45±7              | 115±17   |
| ◎Coil Impedance(Ω)   | 110               | 200      |
| Output S.P.L(dB)     | ≥85               |          |
| Rated Frequency(Hz)  | 2048              |          |
| Operating Temp.(°C)  | -30~+85           |          |
| Storage Temp.(°C)    | -40~+85           |          |
| Housing Material     | Noryl - SE1- GFN2 |          |
| Weight (g)           | 7                 |          |

**◆ Dimension**

Unit:mm

Tolerance:±0.3mm

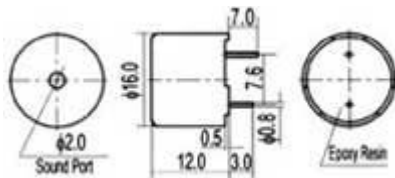

**◆ Frequency Response**

Applied Voltage : 6V, 50% Duty Square Wave

Measuring Distance : 10cm

