

**SPECIFICATION SHEET**

**ELECTRONIC SPECIFICATION:**




***HCM18CA SERIES :***

Type	HCM1806CA	HCM1812CA	HCM1824CA
Rated Voltage(V)	3~10	6~15	3~30
Operating Voltage(V)	1~5		
Rated Current(mA)	≤50		
Coil Resistance(Ω)	60±9	120±18	380±30
©Coil Impedance(Ω)	90	170	600
Output S.P.L(dB)	≥85		
Rated Frequency(Hz)	2000~2500		
Operating Temp.(°C)	-30~+85		
Storage Temp.(°C)	-40~+85		
Housing Material	Noryl-SE1- GFN2		
Weight (g)	4		

**◆ Dimension**

Unit:mm

Tolerance:±0.3mm

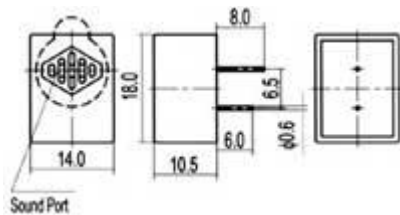

**◆ Frequency Response**

Applied Voltage : 6V, 50% Duty Square Wave

Measuring Distance : 10cm

