

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM09AX SERIES :

Type	HCM0903AX	HCM0905AX	HCM0912AX
Rated Voltage(VDC)	3	5	12
Operating Voltage(VDC)	1~5	3~6	7~15
Rated Current(mA)	≤50	≤30	
Coil Resistance(Ω)	18±2	18±2	18±2
Output S.P.L(dB)	≥75	≥80	
Rated Frequency(Hz)	2800±400		
Operating Temp.(°C)	-25~+70		
Storage Temp.(°C)	-30~+85		
Housing Material	PPO		
Weight (g)	2		

◆ Dimension

Unit:mm

Tolerance:±0.3mm

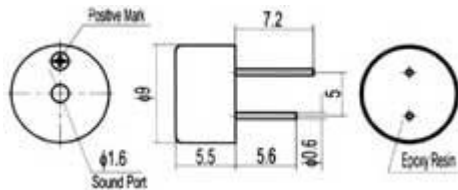

◆ Frequency Response

Measuring Temperature : 25°C

Measuring Distance : 10cm

