

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCM12BX SERIES :

| Type | HCM1201Bx | HCM1206Bx | HCM1212Bx |
|--------------------------|----------------|-----------|-----------|
| Rated Voltage(VDC) | 1.5 | 6 | 12 |
| Operating Voltage(VDC) | 1.4~2 | 3~7 | 8~16 |
| Rated Current(mA) | ≤25 | ≤30 | |
| Sound Output at 10cm(dB) | ≥75 | ≥85 | |
| Rated Frequency(Hz) | 2300±400 | | |
| Operating Temp.(°C) | -20~+80 | | |
| Housing Material | Noryl SE1-GFN2 | | |
| Weight (g) | 1.6 | | |

◆Dimension

Unit:mm

Tolerance:±0.3mm

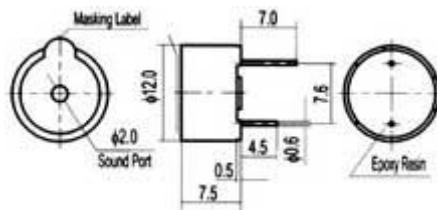

◆Characteristics Response

Measuring Temperature:25°C

Measuring Distance : 10cm

