

HCS0503B

◆Dimension



Unit: mm

Tolerance: ± 0.3 mm

◆Frequency Response

Applied Voltage: 3V, 50% duty square wave

Measuring Distance: 10cm

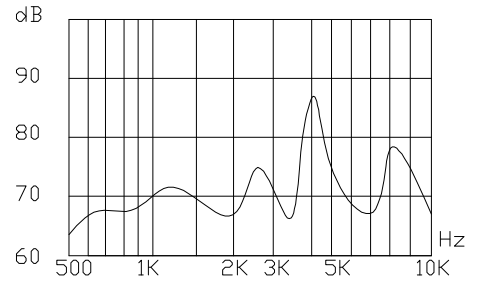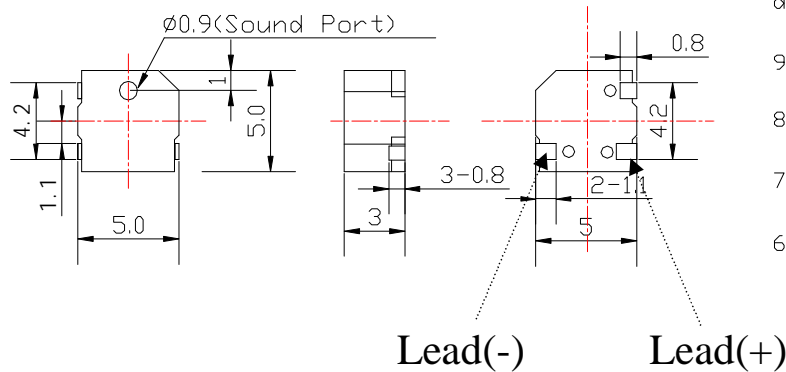

◆Requirement

Rated Voltage:	3V
Operating voltage Range:	2V~4V
Output S. P. L:	≥ 75 dB
Rated current:	≤ 80 mA
Coil Resistance:	$12 \pm 3 \Omega$
Rated Frequency:	4000Hz
Operating Temp.:	$-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Storage Temp.:	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Housing Material:	LCP
Product Weight:	0.3g