

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:




HCS12D SERIES :

| Type | HCS1201D |
|----------------------|----------|
| Rated Voltage(V) | 1.5 |
| Operating Voltage(V) | 1~3 |
| Rated Current(mA) | ≤30 |
| Coil Resistance(Ω) | 50±5 |
| Output S.P.L(dB) | ≥84 |
| Rated Frequency(Hz) | 2048 |
| Operating Temp.(°C) | -40~+85 |
| Storage Temp.(°C) | -40~+85 |
| Housing Material | PPS |
| Weight (g) | 2 |

◆Dimension

Unit:mm

Tolerance:±0.3mm

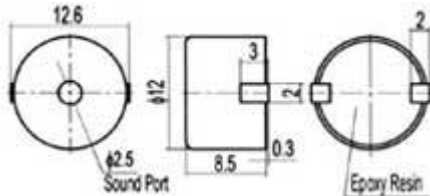

◆Frequency Response

Applied Voltage : 1.5V, 50% Duty Square Wave

Measuring Distance : 10cm

