

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:



HPS16A:


Type	HPS16A
Rated Voltage(VP-P)	3
Operating Voltage(VP-P)	1~25
★Rated Current(mA)	≤5
★Sound Output at 10cm(dB)	≥75
Rated Frequency(Hz)	4000±500
Capacitance(nF)	20±30%
Operating Temp.(°C)	-20~+70
Storage Temp.(°C)	-40~+85
Weight(g)	1.2

★Value Applying Rated voltage, Rated Frequency, 50% Duty Square Wave

◆Dimension

Unit:mm

Tolerance:±0.3mm

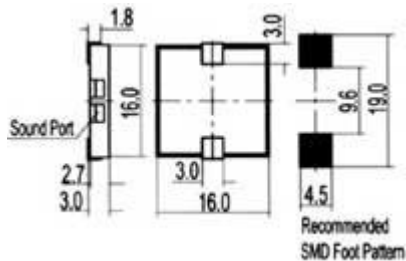

◆Frequency Response

Applied Voltage: 3 VP-P,50%Duty Square Wave

Measuring Distance:10cm

