

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:



HPA40A:


Type	HPA40A
Rated Voltage(VP-P)	9
Operating Voltage(VP-P)	6~12
★Rated Current(mA)	≤10
★Sound Output at 10cm(dB)	≥90
Rated Frequency(Hz)	3400±500
Capacitance(nF)	25±30%
Operating Temp.(°C)	-20~+70
Storage Temp.(°C)	-30~+85
Housing Material	ABS
Weight(g)	12

★Value Applying Rated voltage, Rated Frequency, 50% Duty Square Wave

◆ Dimension

Unit:mm

Tolerance:±0.3mm

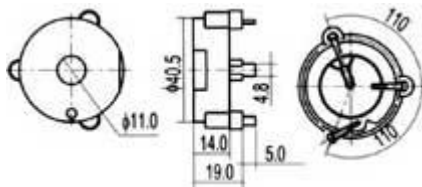

◆ Frequency Response

Applied Voltage: 9 VP-P,50%Duty Square Wave

Measuring Distance:10cm Test Circuit:

