

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:



HPA44B-W:


Type	HPA44B-W
Rated Voltage(VP-P)	12
Operating Voltage(VP-P)	1~30
★Rated Current(mA)	≤10
★Sound Output at 30cm(dB)	≥80
Rated Frequency(Hz)	1000±500
Capacitance(nF)	45±30%
Operating Temp.(°C)	-20~+60
Storage Temp.(°C)	-30~+70
Housing Material	ABS
Weight(g)	10

★Value Applying Rated voltage, Rated Frequency, 50% Duty Square Wave

◆ Dimension

Unit:mm

Tolerance:±0.3mm

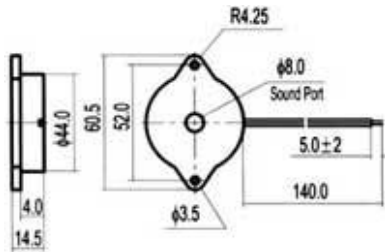

◆ Frequency Response

Applied Voltage: 12 VP-P,50%Duty Square Wave

Measuring Distance:10cm

