

## SPECIFICATION SHEET

### ELECTRONIC SPECIFICATION:



#### HPA40AX:


Type	HPA40AX
Rated Voltage(VDC)	9
Operating Voltage(VDC)	7~20
★Rated Current (mA)	≤50
★Sound Output at 10cm(dB)	≥100
Generated Frequency(Hz)	3200±500
Operating Temp. (°C)	-20~+60
Storage Temp.(°C)	-30~+70
Housing Material	ABS
Weight(g)	12.5

★Value Applying Rated Voltage DC

#### ◆Dimension

Unit:mm

Tolerance:±0.3mm

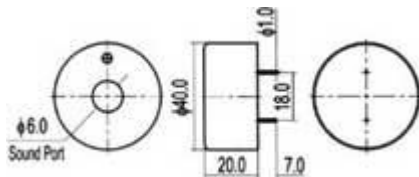

#### ◆Frequency Response

Measuring Temperature:25°C

Measuring Distance : 10cm

