

SPECIFICATION SHEET

ELECTRONIC SPECIFICATION:



HPM30AX:


Type	HPM30AX	HPM30AX-F
Rated Voltage(VDC)	12	
Operating Voltage(VDC)	3~20	
★Rated Current (mA)	≤15	
★Sound Output (dB)	≥90	≥85
Rated Frequency(Hz)	3500±500	
Tone(dB)	Continuous	Fast plue
Pulse Frequency(Hz)	3.0±20%	
Operating Temp. (°C)	-20~+70	
Storage Temp.(°C)	-30~+80	
Housing Mas	MPPO	
Weight(g)	7	

★Value Applying Rated Voltage DC

◆Dimension

Unit:mm

Tolerance:±0.3mm

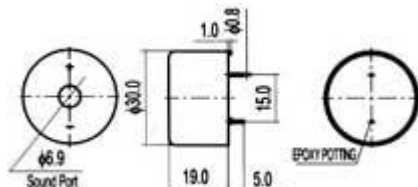

◆Frequency Response

Measuring Temperature:25°C

Measuring Distance : 30cm

